


## Automatik 6T51 21Jewels

### A: Setting the day and the language

- (1) Pull out crown to pos.1 and turn the hands clockwise over 12:00 PM to 6:00 AM.
- (2) Turn the hands back to 9:00 PM and afterwards again forward to 6:00 AM.
- (3) Repeat procedure (2), until the day is displayed in the desired language. (The indication changes one step alternating in English and German per **complete procedure.**)
- (4) Set the correct time (see C:) and push crown to pos.0.

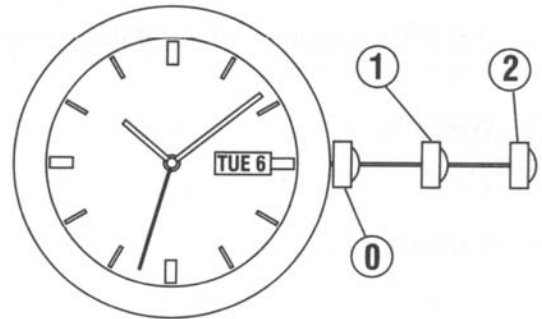

### B: Setting the date

Attention! This setting shouldn't be done between 9:00 PM and 6:00 AM because in this period the date is in the changing mode.

- (1) The date can be changed fast: Pull crown to pos.2 and push it back to pos.1.
- (2) Repeat this procedure until the correct date is displayed.
- (3) Set the correct time (see C:) and push crown to pos.0.

### C: Setting the time

- (1) Pull crown to pos.1 and turn the hands clockwise to the correct time.
- (2) Push crown to pos.0.